




Octagonal Pole Curved Arm with Direct – In Ground Mounted


Technical Specification

APPLICATION


Street lighting column with curved or radial arm has many applications ranging from main roads, residential suburbs, commercial developments, parking areas, pathways and more.




HOOK BOLT




EARTHING LUG




**SERVICE DOOR
DETAIL**




**SERVICE DOOR
SIDE VIEW**



**ANTI-SINKING PLATE
(F) THICKNESS**



SECTION A-A

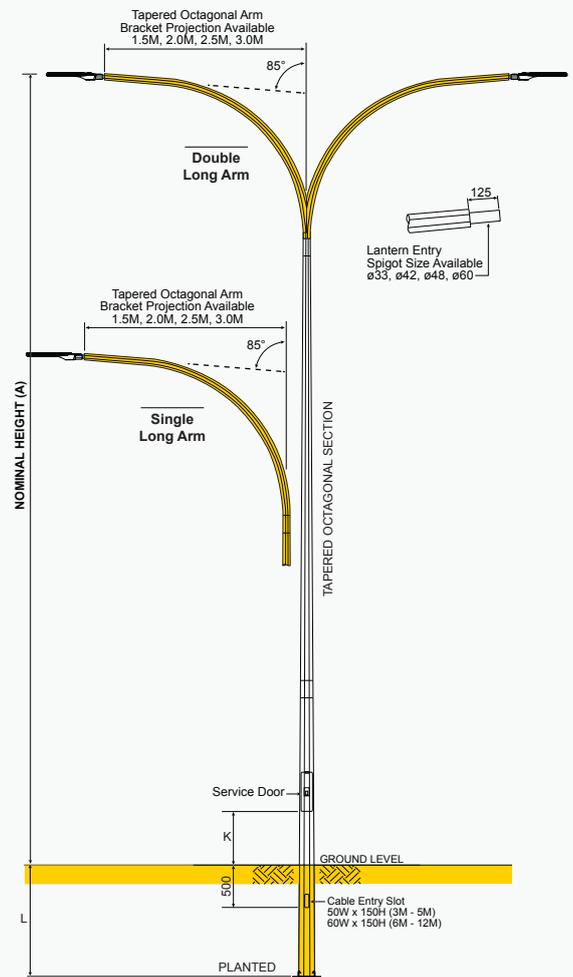

* Option
- Fiber Service Door : 490mm (H) x 185mm (W)

NOMINAL HEIGHT (A)	B	C	D	E x (F) THK.	GRD. LVL. to SRVC. DOOR (K)	PLANTING DEPTH (L)
6M	450mm	100mm	300mm	300 x 2.5mm	305mm	1.2M
7M	450mm	100mm	300mm	300 x 2.5mm	305mm	1.2M
8M	450mm	120mm	300mm	300 x 2.5mm	305mm	1.3M
9M	450mm	120mm	300mm	300 x 2.5mm	610/1850mm	1.4M
10M	450mm	120mm	300mm	350 x 2.5mm	610/1850mm	1.5M
12M	450mm	120mm	300mm	400 x 2.5mm	610/1850mm	1.7M